#### Characteristics - Ladder

- The only metallic parts are the homologated A-4 quality and stainless screws.
- Ladders can be manufactured following customer's dimensions needs.
- Very robust and comfortable ladders. 400mm. step, and safety rings with 750mm. diameter.


#### <u>Characteristics - Safety Cage</u>

- Manufactured with hand finished rings with 750mm. diameter, 65mm. width and 10mm. thickness.
- Perfect concrete fixing thanks to its polyamide piece in both sides of the ring.
- Concrete fixing is made by using certified A-4 screws with stainless washers.
- Thanks to the fiber glass, which is currently taking over the stainless Steel, we get the following advantages: stainless, not electricity conductor, UV resistant, light weight, easily adaptable and low installation cost.
- Client must provide us with the measures of the protection needed place (always in 500mm. multiples) so we can pre-drill the product. By doing this, the protection comes completely finished (including all the needed screws and pieces, achieving an easier transport and installation).
- The product is sent disassembled, you just have to put together the rings with the union plates, after doing that the product is ready to be fixed to the wall.
- Every ring comes with 5 screws in order to put the plates together, 4 in each ring with the polyamide piece and 4 concrete screws.
- The ladder can be upgraded by adding an anti-vandalism access, made of stainless steel with a rubber seal. You can block the access using a bar and a lock.
- This system overpass the CTE and INSHT requirements.





## **Standard Measures**

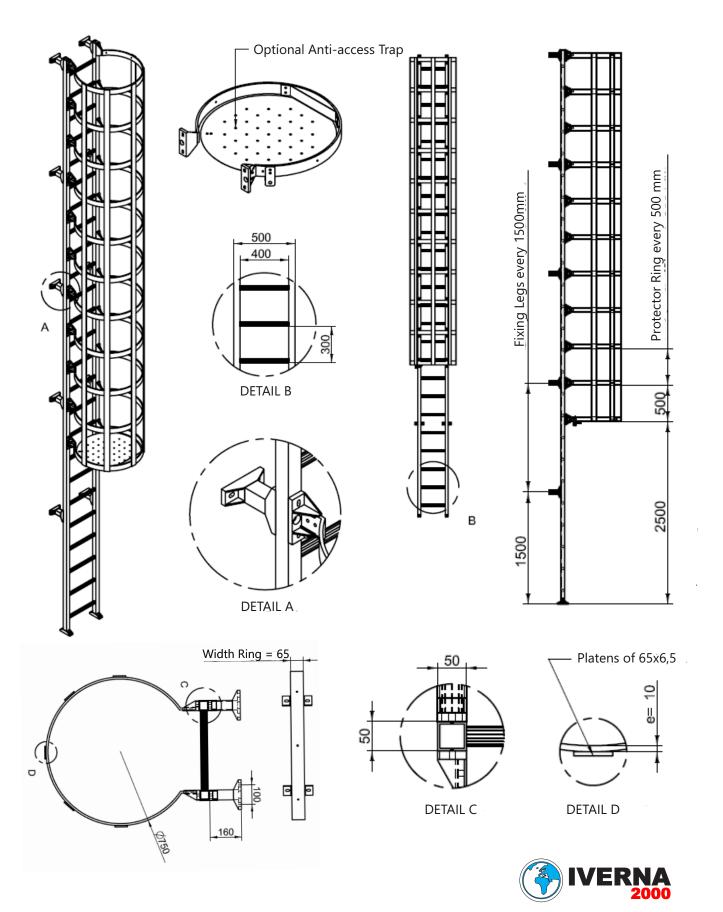


# Installation example







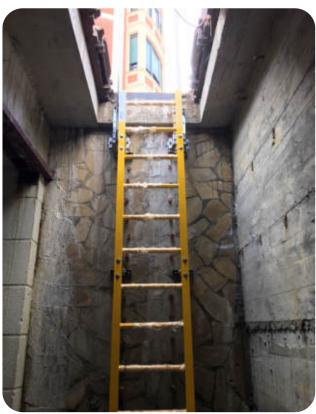



# Installation example









## Installation example









