




ADJUSTABLE SAFETY RINGS

Characteristics

- Adjustable safety rings – Fall protection: Zinc - or - Stainless steel AISI-304
- Fall protection safety rings, zinc of 800mm depth by 800mm width.
- Zinc billets of union, with torn hole of 50mm of 40 x 4 x 330mm.
- Zinc adjustable billets of union with torn hole of 50mm of 40 x 4 x 660mm.
- Angular of completion for the assembly of security hoops a meter over the end of the wall of 1500 x 50 x 5 mm.
- Screw M 10 x 25mm zinc nut and washer.

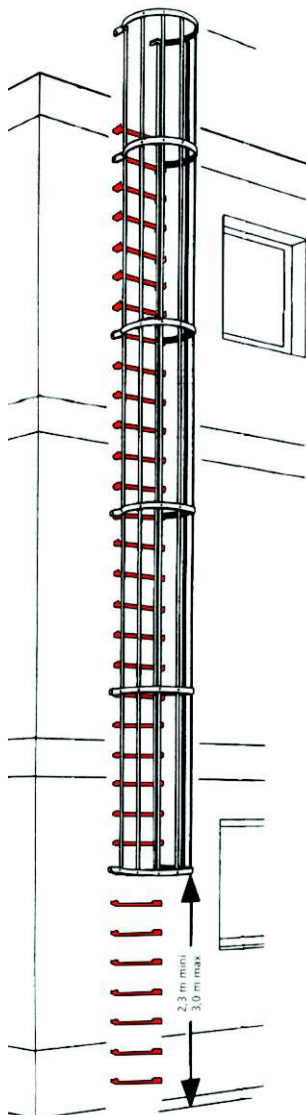

Internal detail



External detail

Installation

1. Place the first rings at level fixing it to the wall.
2. Screw a line of billets in top of the ring.
3. Mount the second ring.
4. Fix the second ring to the Wall.
5. Place another line of billets, using the same screws.

Be aware that the product is supposed to be installed from the ground and not from the top of the structure.

Needed tools:

- Drill with M 10 concrete drill.
- Monkey wrench or fixed key 16/17.