




Characteristics

- Polypropylene with reinforced steel calibrated with hardness of 65 kg / mm².
- Adaptable to curved and straight surfaces.
- An ergonomic, compact, robust design, highly resistant to impact.
- Non-slip surfaces and side flaps.
- Anvil for the proper introduction of pate.
- Customizable to best suit customer needs.
- It complies with the European standard EN-13101 quality regulation.

Installation

Drill two holes with a heavy hammer drill (85mm. depth), using a 25mm ø broach. The distance between the center of the holes is 330, 320 or 300mm depending on model). Introduce the Pate hitting alternatively in both sides of it with a big size nylon hammer.

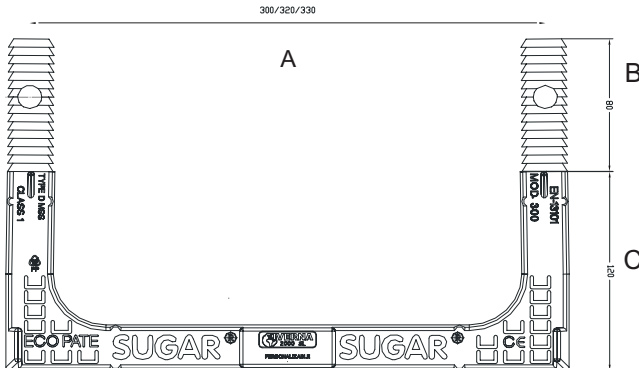

Modelo/ model	Medidas/ measures			Embalaje/ package	Color/ colour
	A	B	C		
ECOPATE 300	300mm	80mm	120mm	Palet 1600 uds./units	naranja / orange
ECOPATE 320	320mm	80mm	120mm	Palet 1600 uds./units	naranja / orange
ECOPATE 330	330mm	80mm	120mm	Palet 1600 uds./units	naranja / orange

